
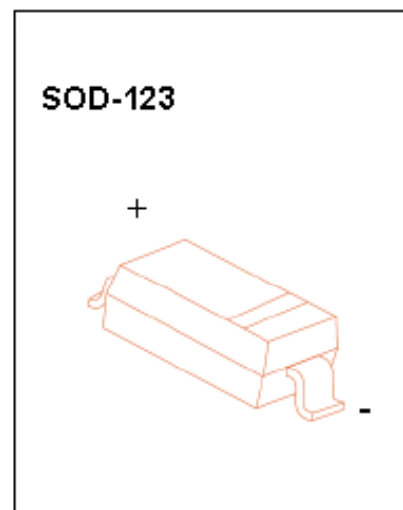


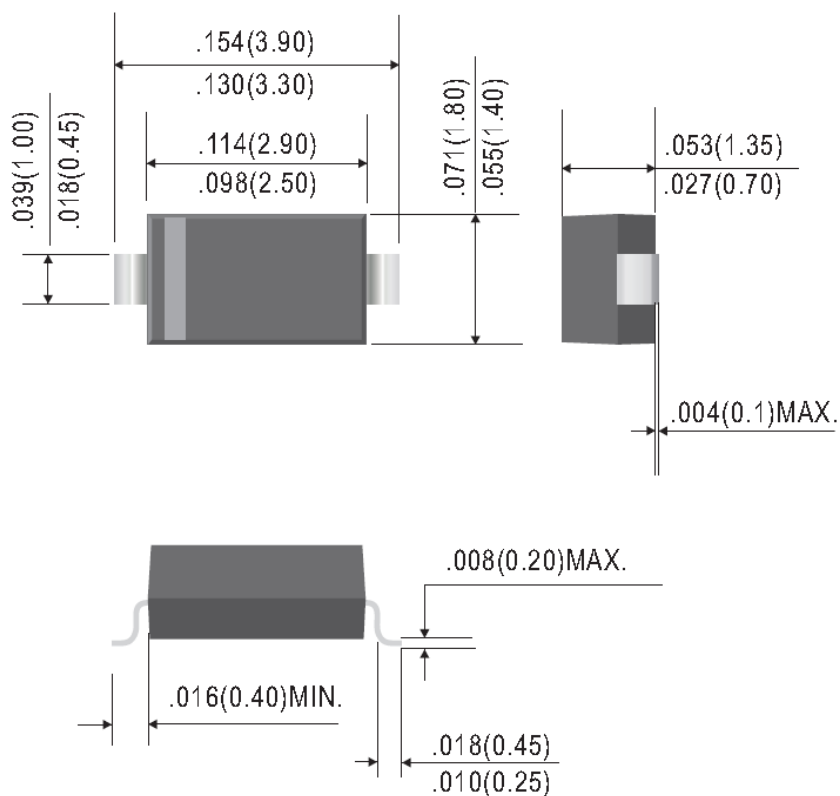

Dimensions in inches and (millimeters)

FEATURES

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance
- Pb-Free package is available
- RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"
- Moisture Sensitivity Level 1
- Polarity: Color band denotes cathode end

MARKING: **T5**
 A3

Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Peak Reverse Voltage	V_{RRM}	75	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R		
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Forward Continuous Current	I_{FM}	500	mA
Average Rectified Output Current	I_O	250	mA
Peak Forward Surge Current	I_{FSM}	4	A
		1.5	
Power Dissipation	P_D	500	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	250	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Operating/Storage Temperature	T_{STG}	-55~+150	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R=10\mu\text{A}$	75	—	—	V
Forward Voltage	V_{F1}	$I_F=5\text{mA}$	0.62	—	0.720	
	V_{F2}	$I_F=10\text{mA}$	—	—	0.855	
	V_{F3}	$I_F=100\text{mA}$	—	—	1.00	
	V_{F4}	$I_F=150\text{mA}$	—	—	1.25	
Reverse Current	I_{R1}	$V_R=75\text{V}$	—	—	2.5	μA
	I_{R2}	$V_R=20\text{V}$	—	—	25	nA
Capacitance between terminals	C_T	$V_R=0\text{V}$, $f=1\text{MHz}$	—	—	4	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10\text{mA}$ $I_{rr}=0.1I_{IR}$, $R_L=100\Omega$	—	—	4	ns

Typical Characteristics

