



Bypass Solar Diodes

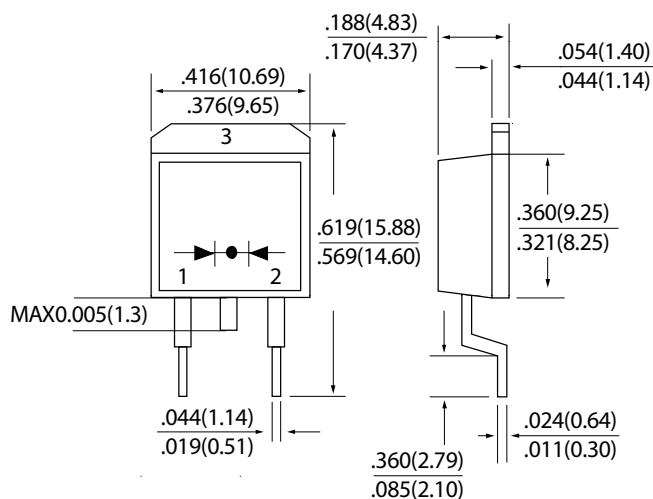

D2PAK

Dimensions in inches and (millimeters)



Ordering Information	
Part Number	Remark
PV3045CD2	General
PV3045CD2-H	Halogen Free
PV3045CD2-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	30A
V_{RRM}	45V
I_{FSM}	200A
V_F	0.65V
$T_J \text{ max}$	150°C

Features

- Guardring for overvoltage protection
- Very small conduction losses
- Low forward voltage drop
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Cases: D2PAK
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.43 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	PV3045CD2	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	45	V
Maximum RMS voltage	V_{RMS}	31.5	V
Maximum DC blocking voltage	V_{DC}	45	V
Maximum average forward rectified current (Total) (Per Leg)	I_F	30 15	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200.0	A
Maximum Instantaneous Forward Voltage IF=15A @ 25°C	V_F	0.65	V
Maximum DC Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=100°C	I_R	0.5 100	mA
Typical Junction Capacitance(NOTE1)	C_j	800	pF
Typical Thermal Resistance	$R_{\theta JC}$	3	°C/W
Junction temperature in DC forward mode	T_J	-50 ~ 150°C ≤ 200°C	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

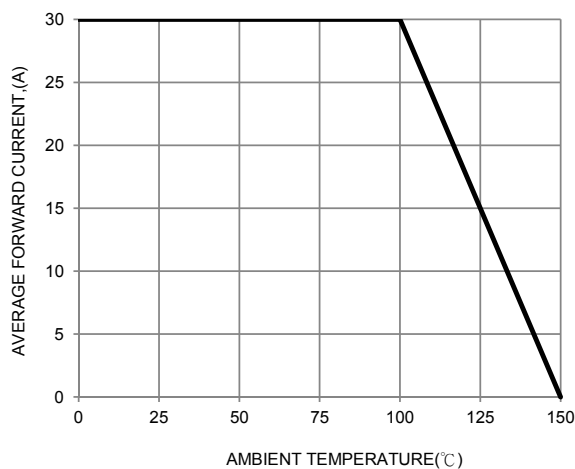


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

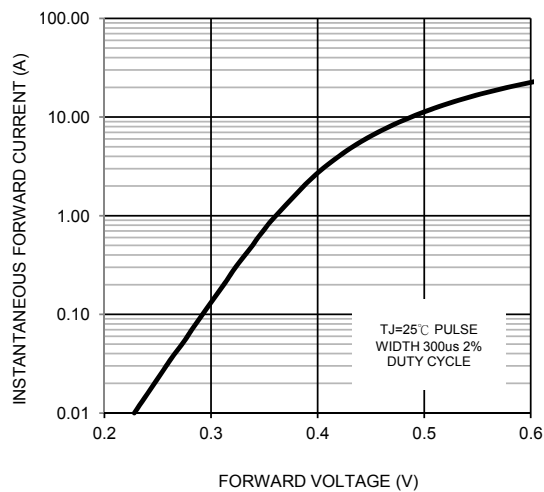


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

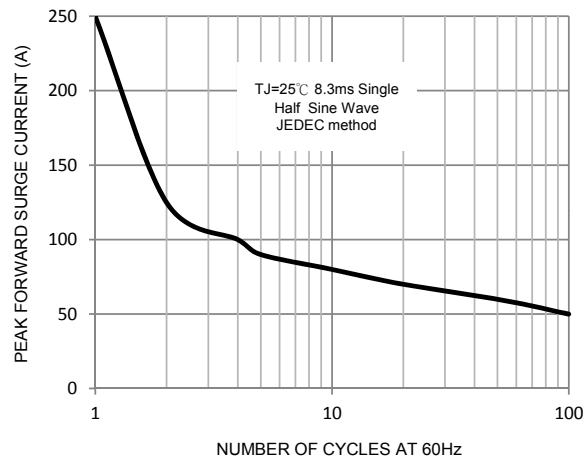


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

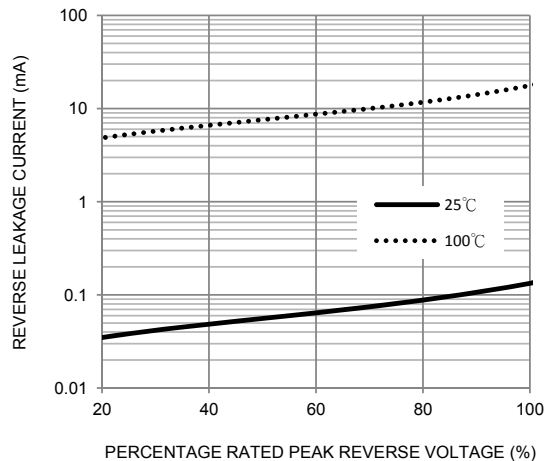


FIG. 5-TYPICAL JUNCTION CAPACITANCE

