


General Purpose Rectifiers Blocking Solar Diodes



DO-201AD

Dimensions in inches and (millimeters)

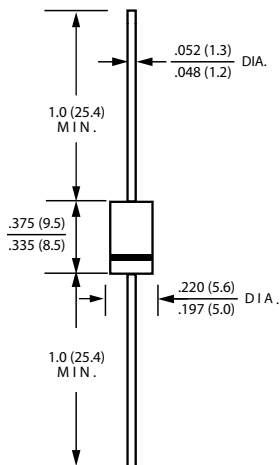

Ordering Information

Part Number	Remark
PV51000G	General
PV51000G-H	Halogen Free

PRIMARY CHARACTERISTICS

I_F	5A
V_{RRM}	1000V
I_{FSM}	125A
V_F	1.1V
$T_J \text{ max}$	150°C

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC

Mechanical Data

- Cases: DO-201AD
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.071 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	PV51000G	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	1000	V
Maximum RMS voltage	V_{RMS}	700	V
Maximum DC blocking voltage	V_{DC}	1000	V
Maximum average forward rectified current	I_F	5	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125	A
Maximum Instantaneous Forward Voltage $I_F=5A @ 25^\circ C$	V_F	1.1	V
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	I_R	10 50	uA
Typical Junction Capacitance(NOTE1)	C_j	40	pF
Typical Thermal Resistance	$R_{\theta JC}$	15	°C/W
Junction temperature in DC forward mode	T_J	-50 ~ 150°C ≤ 200°C	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

General Purpose Rectifiers Blocking Solar Diodes

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

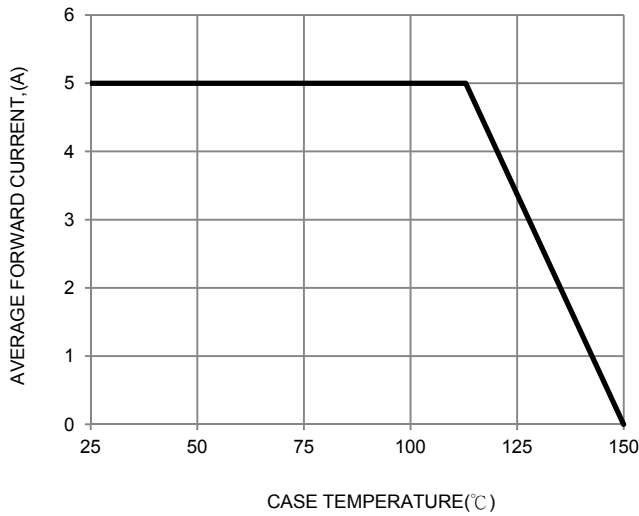


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

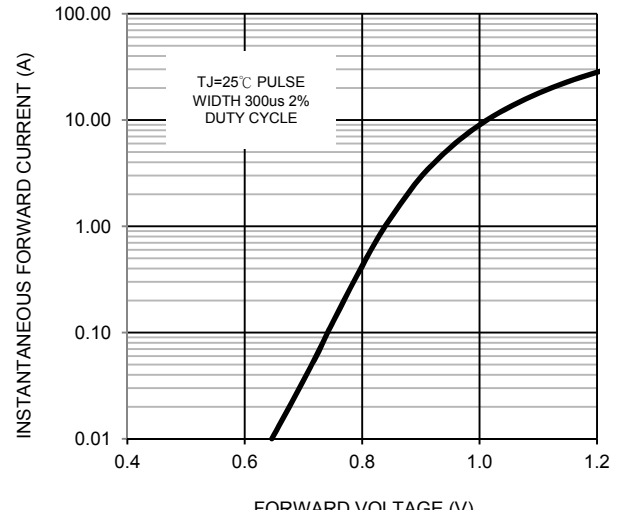


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

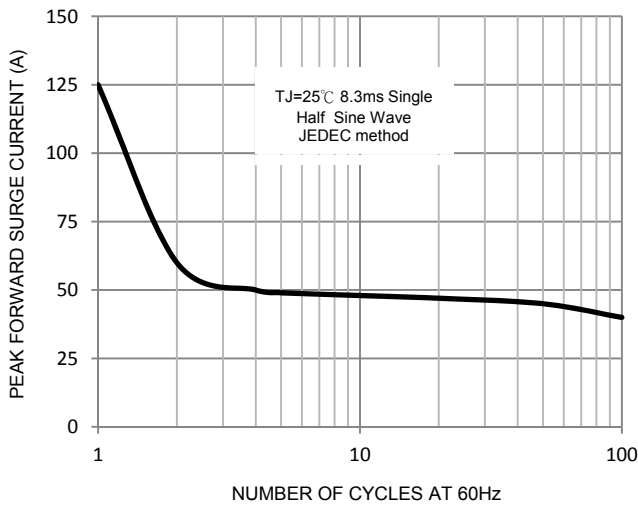


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

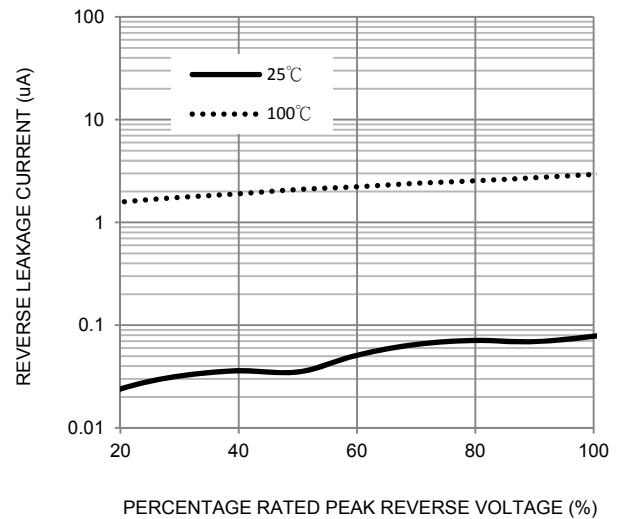


FIG. 5-TYPICAL JUNCTION CAPACITANCE

