
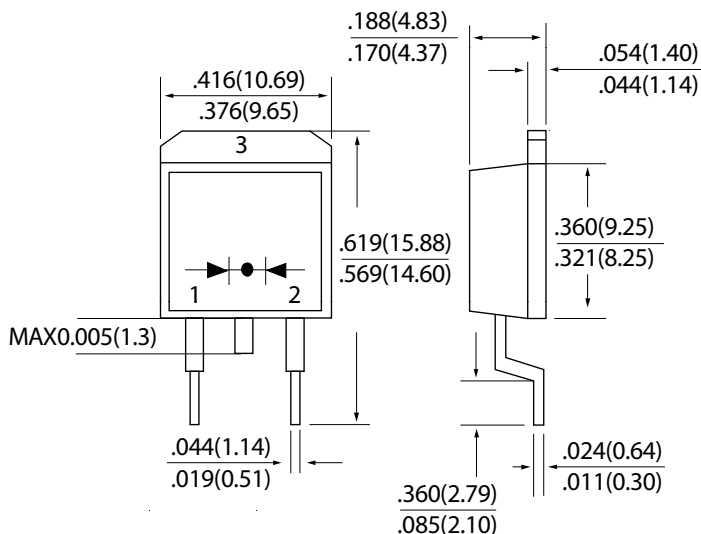


General Purpose Rectifiers Glass Passivation Junction



D2PAK

Dimensions in inches and (millimeters)

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Ordering Information	
Part Number	Remark
RL200xCD2	General
RL200xCD2-H	Halogen Free
RL200xCD2-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	20A
V_{RRM}	50~1000V
I_{FSM}	250A
V_F	1.2V
$T_J \text{ max}$	150°C

Mechanical Data

- Cases: D2PAK
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.430 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	RL20 01CD2	RL20 02CD2	RL20 03CD2	RL20 04CD2	RL20 05CD2	RL20 06CD2	RL20 07CD2	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current (Total) (Per Leg)	I_F	20 10							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	250.0							A
Maximum Instantaneous Forward Voltage $I_F=10A @ 25^\circ C$	V_F	1.2							V
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	I_R	10 100							uA
Typical Junction Capacitance(NOTE1)	C_j	50							pF
Typical Thermal Resistance	$R_{\theta JC}$	3							°C/W
Operating Temperature Range	T_J	-55 to +150							°C
Storage Temperature Range	T_{STG}	-55 to +150							°C

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

General Purpose Rectifiers Glass Passivation Junction

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

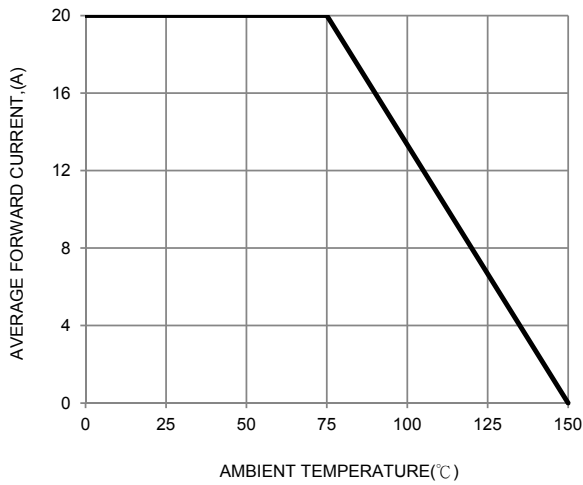


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

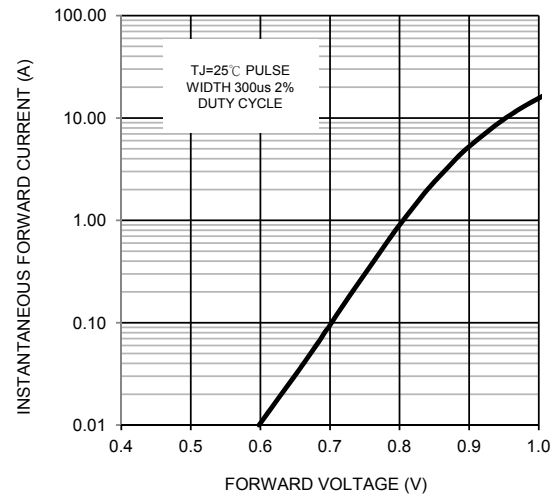


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

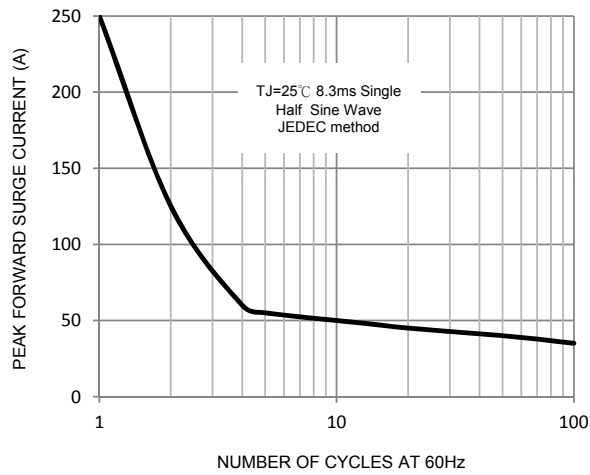


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

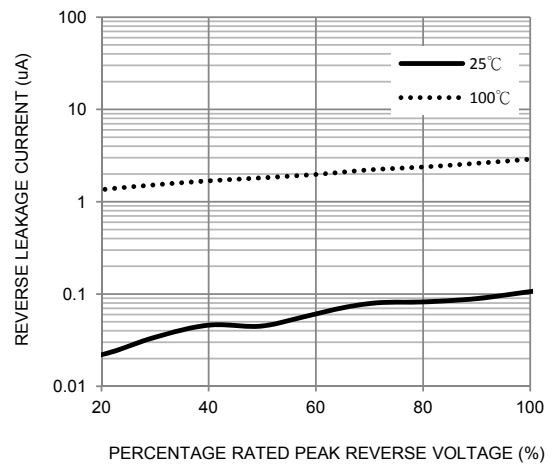


FIG. 5-TYPICAL JUNCTION CAPACITANCE

