



General Purpose Rectifiers Glass Passivation Junction

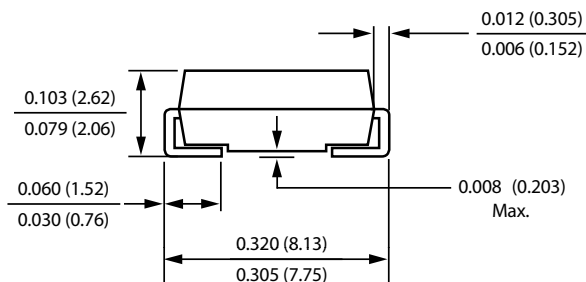

DO-214AB(SMC)

Dimensions in inches and (millimeters)

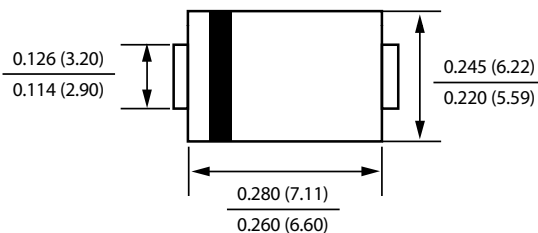

Ordering Information

Part Number	Remark
S5xC	General
S5xC-H	Halogen Free
S5xC-Q	Automotive

PRIMARY CHARACTERISTICS

I_F	5A
V_{RRM}	50~1300V
I_{FSM}	125A
V_F	1.15V
$T_J \text{ max}$	150°C

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Cases: DO-214AB(SMC)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.231 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	S5AC	S5BC	S5DC	S5GC	S5JC	S5KC	S5MC	S5TC	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	910	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1300	V
Maximum average forward rectified current	I_F	5.0								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125.0								A
Maximum Instantaneous Forward Voltage $I_F=5A @ 25^\circ C$	V_F	1.15								V
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	I_R	5 100								uA
Typical Junction Capacitance(NOTE1)	C_j	50								pF
Typical Thermal Resistance	$R_{\theta Ja}$	100								°C/W
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{STG}	-55 to +150								°C

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

2. Device mounted on FR-4 substrate, 1"×1", 2oz, single-sided, PC boards with 0.15"×0.26" copper pad.

General Purpose Rectifiers Glass Passivation Junction

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

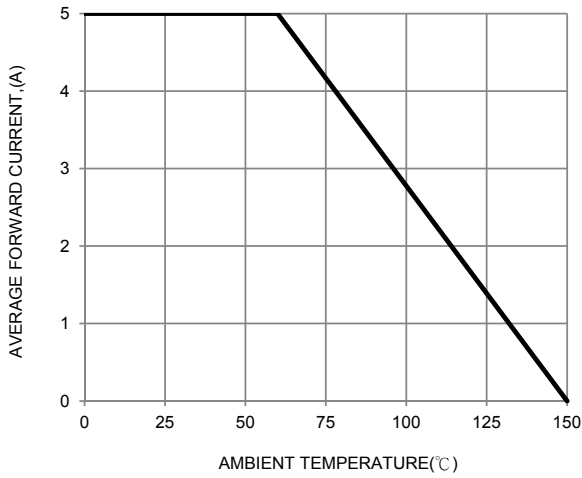


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

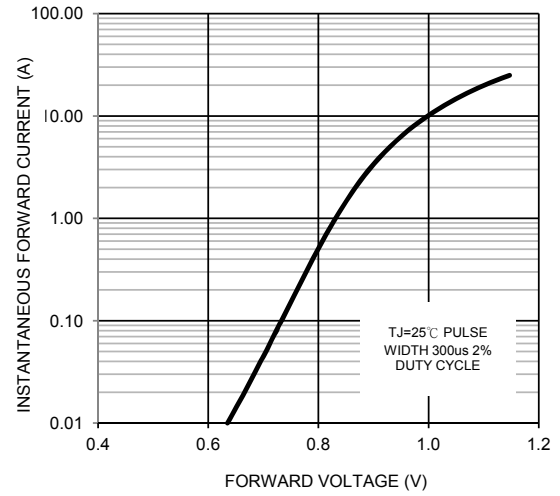


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

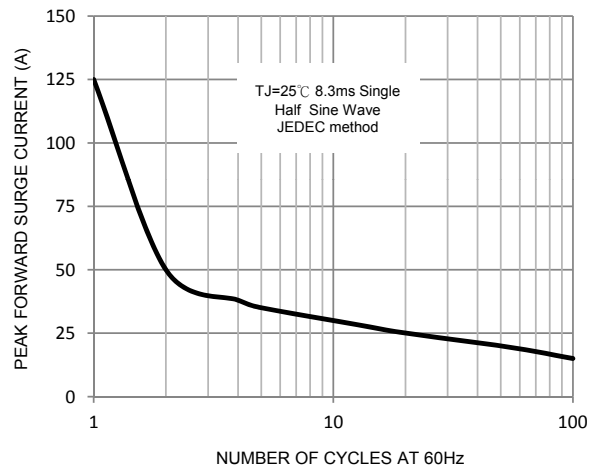


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

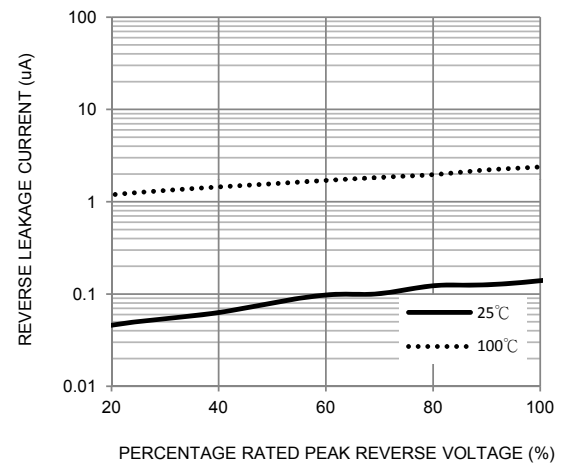


FIG. 5-TYPICAL JUNCTION CAPACITANCE

