



# SR320 THRU SR3200

## 3 A Schottky Barrier Rectifiers

Voltage Range 20 to 200 Volts  
Current 3.0 Amperes


### Features

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

### Mechanical Data

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.34 grams

### DO-201AD

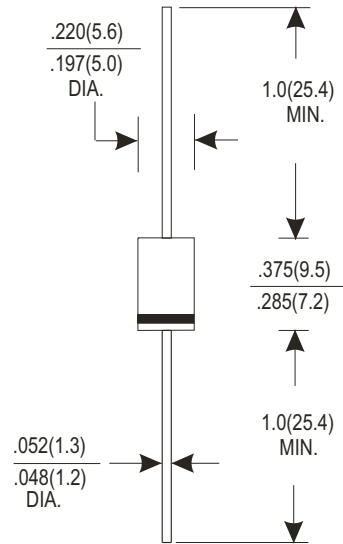

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number	SR320	SR330	SR340	SR350	SR360	SR380	SR3100	SR3150	SR3200	Units
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	150	200	v
Maximum RMS Voltage	14	21	28	35	42	56	70	105	140	v
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	150	200	v
Maximum Average Forward Rectified Current See Fig.1	3.0									A
Peak Forward Surge Current, 8.3 ms Single Half Sinewave -Superimposed on Rated Load method (JEDEC)	80.0									A
Maximum Instantaneous Forward Voltage @ 3.0A	0.50		0.70		0.85		0.87	0.90		V
Maximum D.C. Reverse Current @ T <sub>A</sub> =25°C	0.5			0.2						mA
At Rated DC Blocking Voltage @ T <sub>A</sub> =100°C	10			-						mA
Typical Junction Capacitance (Note 1)	150									pF
Typical Thermal Resistance R <sub>θJA</sub> (Note 2)	35									°C/W
Operating Junction Temperature Range T <sub>J</sub>	-55+150									°C
Storage Temperature Range T <sub>STG</sub>	-55+150									°C

#### Notes:

1. Measured at 1MHz and applied reverse voltage of 4.0Volts D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

[Http://www.upm.com.tw](http://www.upm.com.tw)

E-mail: [upm.tw@msa.hinet.net](mailto:upm.tw@msa.hinet.net)



# SR320 THRU SR3200

## 3 A Schottky Barrier Rectifiers

Voltage Range 20 to 200 Volts  
Current 3.0 Amperes

### RATING AND CHARACTERISTIC CURVES (SR220 THRU SR2100)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

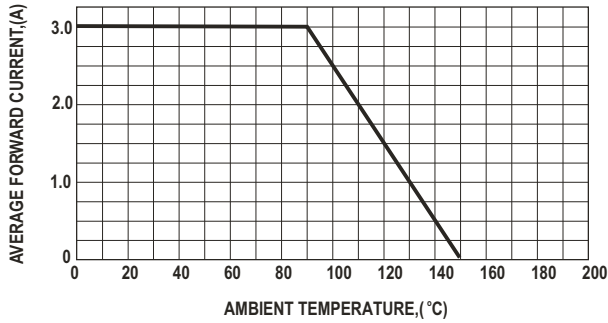


FIG.2-TYPICAL FORWARD CHARACTERISTICS

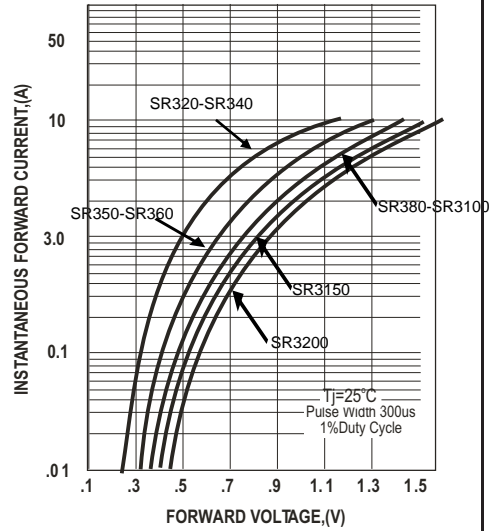


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

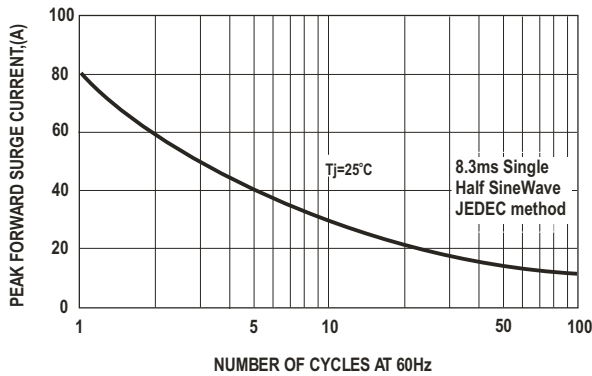


FIG.4-TYPICAL JUNCTION CAPACITANCE

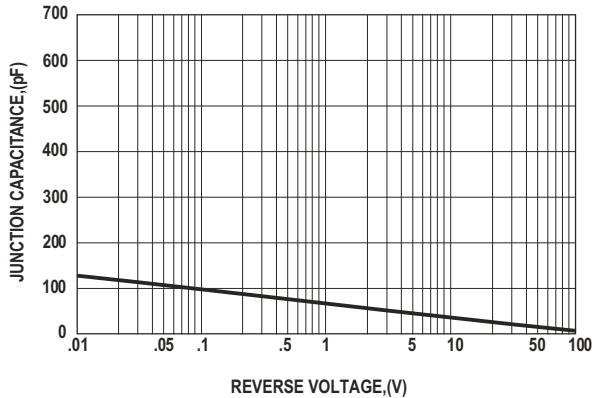


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

