

## Schottky Barrier Rectifiers



**DO-214AA(SMB)**

Features
<ul style="list-style-type: none"> <li>• High current capability</li> <li>• High surge current capability</li> <li>• Low reverse current</li> <li>• Component in accordance to RoHS 2002/95/EC</li> </ul>

Primary Characteristics		
$I_F$	5	A
$V_{RRM}$	20~200	V
$I_{FSM}$	100	A
$V_F$	0.55, 0.7, 0.85, 0.87, 0.90	V
$T_J \text{ max}$	125, 150	°C

Mechanical Data
• Case: DO-214AA(SMB)
• Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
• Terminals: Lead Free Plating (Tin Finish). Solderable per MIL-STD-202, Method 208
• Polarity: Cathode Band
• Weight: 0.092 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
SSXB	General	SMB	3000 / Tape & Reel
SSXB~H	Halogen Free		
SSXB~Q	AEC-Q101 qualified		

Maximum Ratings (TA=25°C unless otherwise noted)												
PARAMETER	SYMBOL	SS 52B	SS 53B	SS 54B	SS 55B	SS 56B	SS 58B	SS 510B	SS 515B	SS 520B	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	$I_F$	5									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	100									A	
Maximum Instantaneous Forward Voltage IF=5A @ 25°C	$V_F$	0.55			0.70		0.85		0.87	0.90	V	
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	$I_R$	0.5 10					0.2 5.0				mA	
Typical Junction Capacitance(NOTE1)	$C_j$	300			250		150			110	pF	
Typical Thermal Resistance	$R_{\theta JC}$	15									°C/W	
Operating Temperature Range	$T_J$	-55 to +125					-55 to +150					°C
Storage Temperature Range	$T_{STG}$	-55 to +150									°C	
Marking Code		SS 52B	SS 53B	SS 54B	SS 55B	SS 56B	SS 58B	SS 510B	SS 515B	SS 520B		

**NOTES:**

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

## Schottky Barrier Rectifiers

### Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

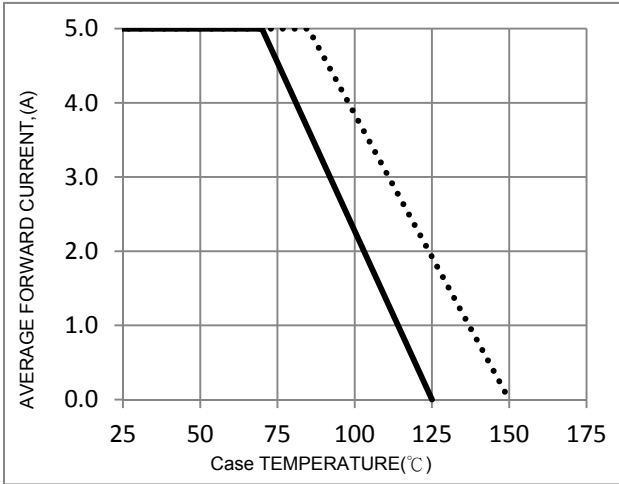


FIG. 2-Typical Forward Characteristics

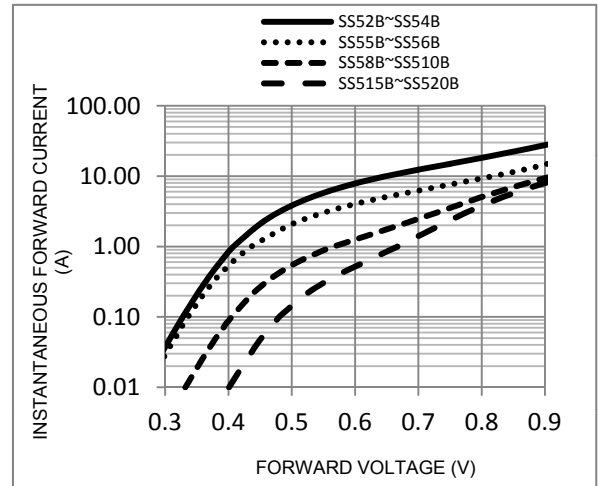


FIG. 3-Maximum Non-Repetitive Forward Surge Current

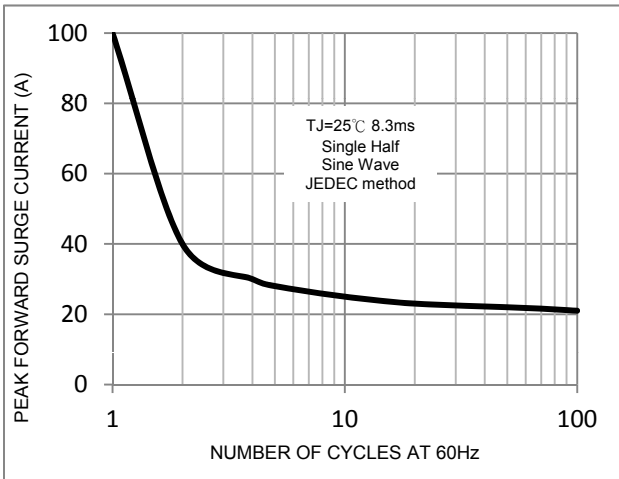


FIG. 4-Typical Reverse Characteristics



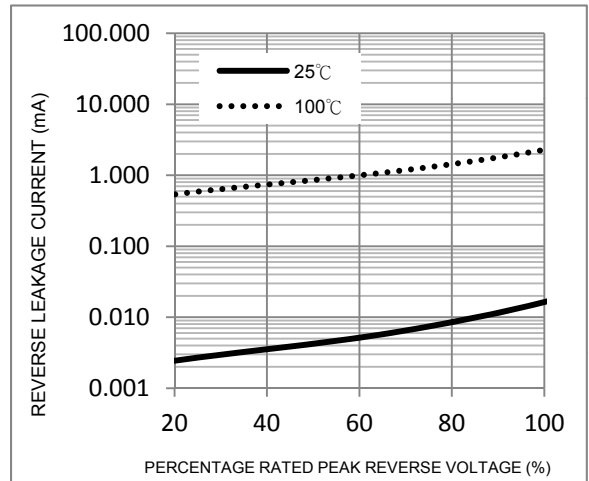


FIG. 5-Typical Junction Capacitance

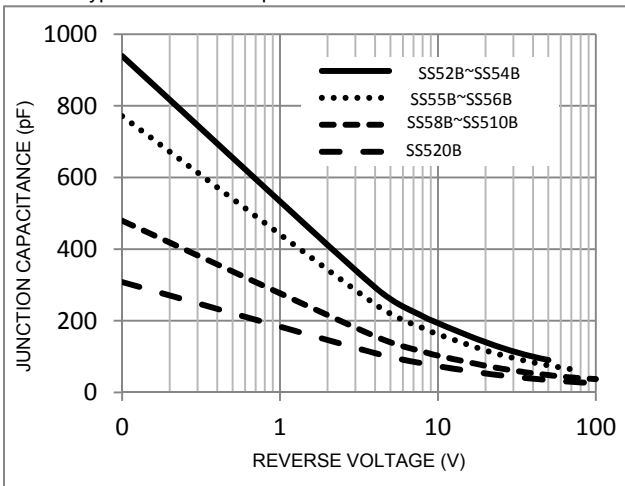

## Schottky Barrier Rectifiers


### Package Outline Dimensions

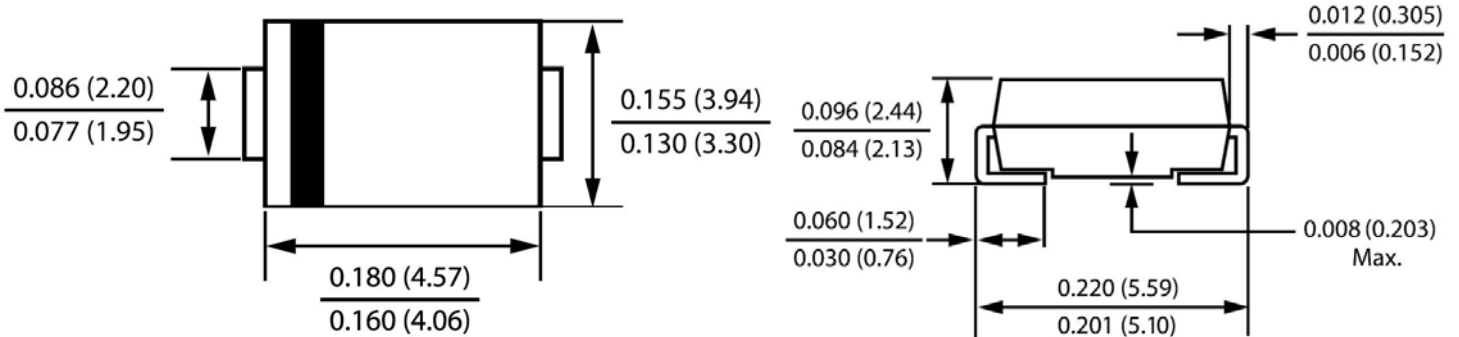

### DO-214AA(SMB)


Dimensions in inches and (millimeters)

### Marking Information

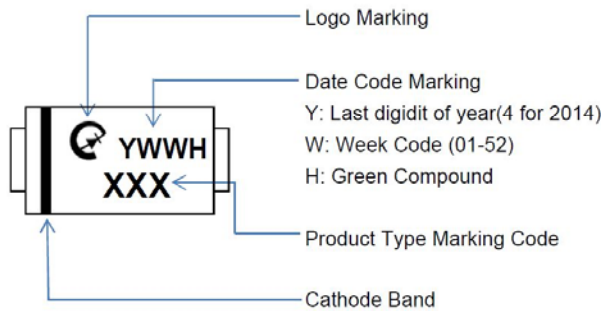

### Suggested Pad Layout

Dimension	Outline	SMB (DO-214AA)
A		6.80
B		1.80
C		2.30
D		2.50
E		4.30



### Tap & Reel Specification

ITEM	SYMBOL	SMB(mm) DO-214AA
Carrier width	A	4.0(max)
Carrier length	B	5.9(max)
Carrier depth	C	3.0(max)
Sprocket hole	d	1.50±0.1
Reel outside diameter	D	330±2.0
Feed hole diameter	D0	13.5±1
Reel inner diameter	D1	50 (min.)
Sprocket hole position	E	1.75±0.1
Punch hole position	F	5.5±0.05
Sprocket hole pitch	P	8.0±0.1
Sprocket hole pitch	Po	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.6 (max)
Tape width	W	12.0±0.3
Reel width	W2	18.4 (max)
Reel width	W1	14.4 (max)

