


Schottky Barrier Rectifiers



DO-214AB(SMC)

Dimensions in inches and (millimeters)

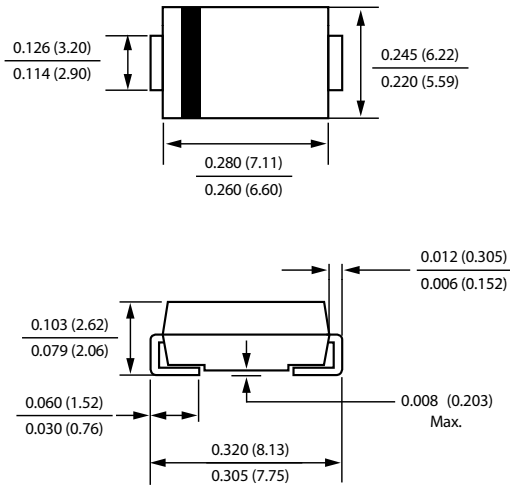

Ordering Information	
Part Number	Remark
SSXC	General
SSXC-H	Halogen Free
SSXC-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	8A
V_{RRM}	20~200V
I_{FSM}	125A
V_F	0.55V, 0.70V, 0.85V, 0.87V, 0.90V
T_J max	125°C, 150°C

Features

- Low profile package
- Ideal for automated placement
- Guard Ring for over voltage protection
- Low forward voltage drop
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Case: DO-214AB (SMC)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead Free Plating (Tin Finish). Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.231 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	SS 82C	SS 83C	SS 84C	SS 85C	SS 86C	SS 88C	SS 810C	SS 815C	SS 820C	UNIT	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	I_F	8.0									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125.0									A	
Maximum Instantaneous Forward Voltage IF=8A @ 25°C	V_F	0.55			0.70		0.85		0.87	0.90	V	
Maximum DC Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=100°C	I_R	0.5 30					0.2 10					mA
Typical Junction Capacitance(NOTE1)	C_j	420			300		260		230	200	pF	
Typical Thermal Resistance(NOTE2)	$R_{\theta Ja}$ $R_{\theta Jc}$	50 30									°C/W	
Operating Temperature Range	T_J	-55 to +125					-55 to +150					°C
Storage Temperature Range	T_{STG}	-55 to +150										°C

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC
2. Device mounted on FR-4 substrate, 1"×1", 2oz, single-sided, PC boards with 0.15"×0.26" copper pad.

Schottky Barrier Rectifiers

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

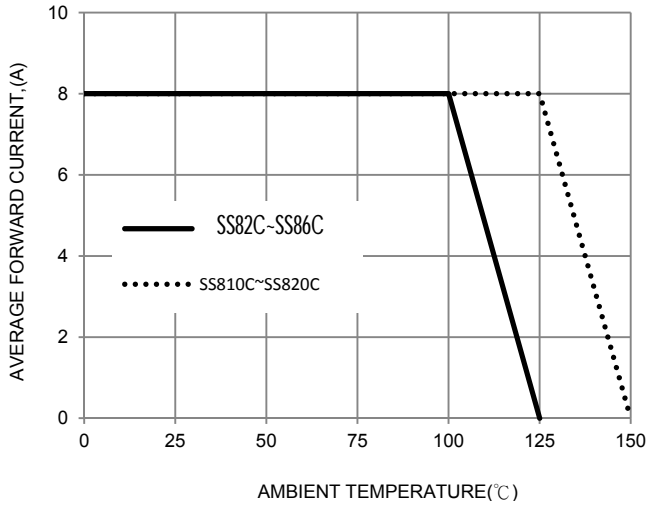


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

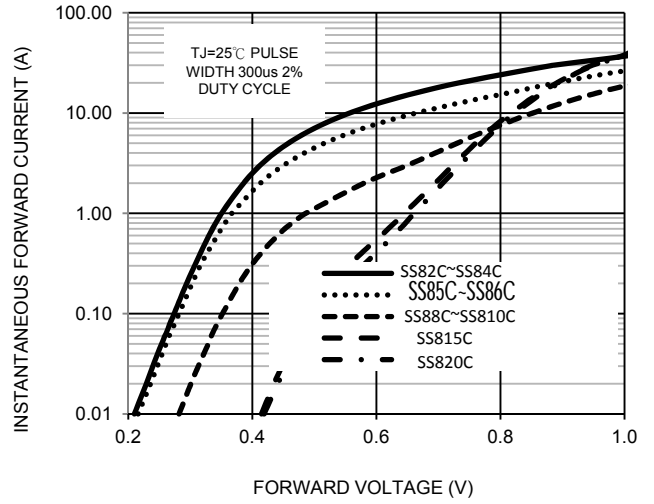


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

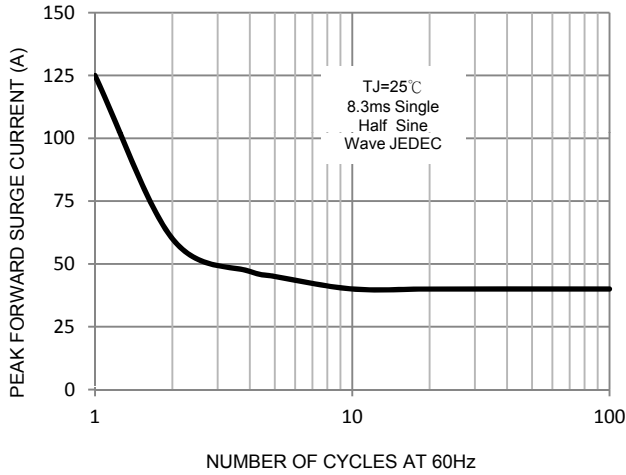


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

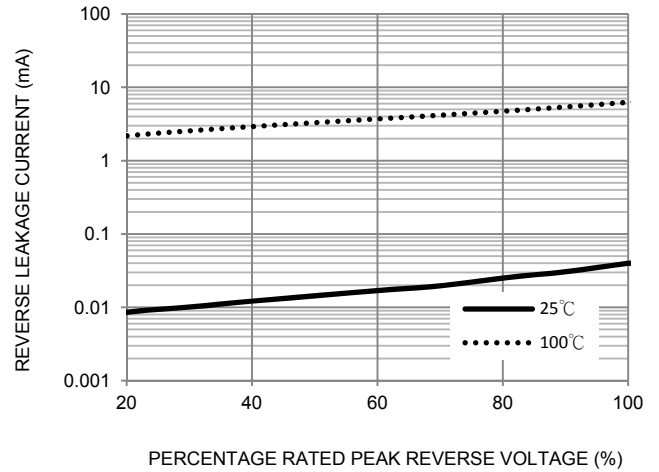


FIG. 5-TYPICAL JUNCTION CAPACITANCE

