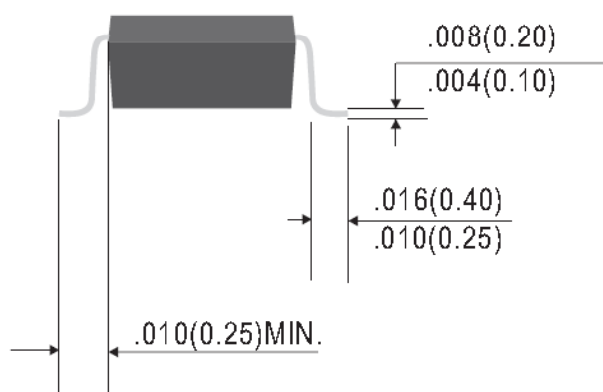
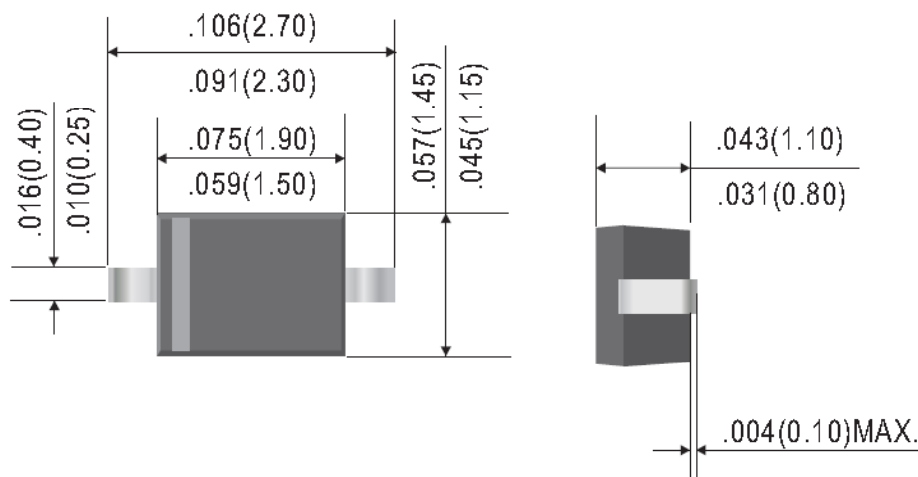
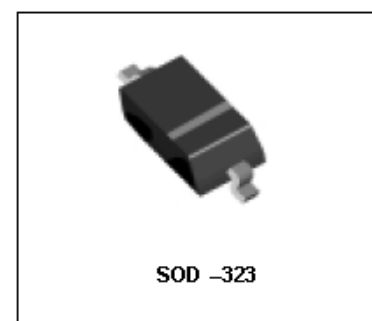




Dimensions in inches and (millimeters)



FEATURES

- Small plastic SMD package
- Pb-Free package is available
- RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"
- Moisture Sensitivity Level 1
- Polarity: Color band denotes cathode end

MARKING: 5D

Surface Mount Switching Diode

Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	100	Vdc
Peak Forward Current	I_F	200	mAdc
Peak Forward Surge Current	$I_{FM(surge)}$	500	mAdc

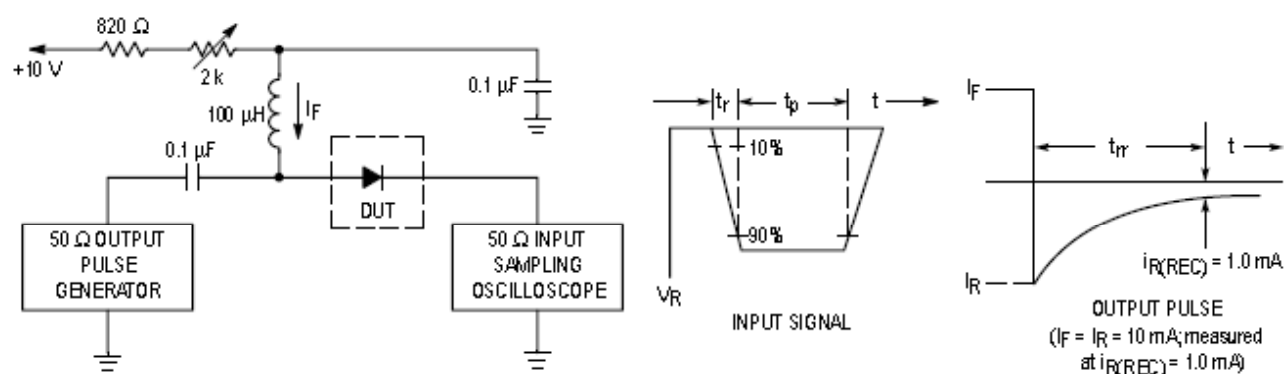
Thermal Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board ⁽¹⁾ $T_A = 25^{\circ}\text{C}$ Derate above 25°C	P_D	200 1.57	mW mW/ $^{\circ}\text{C}$
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	635	$^{\circ}\text{C/W}$
Operating/ Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

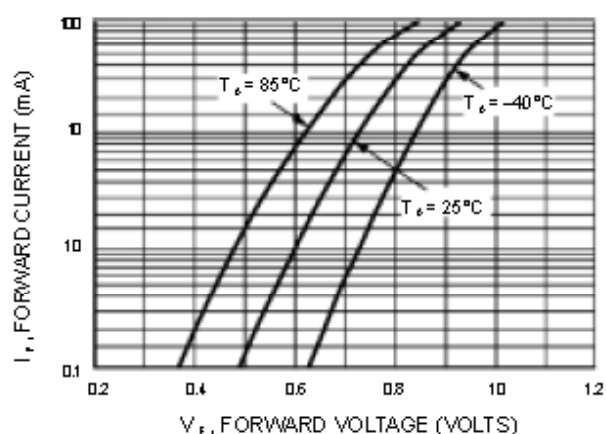
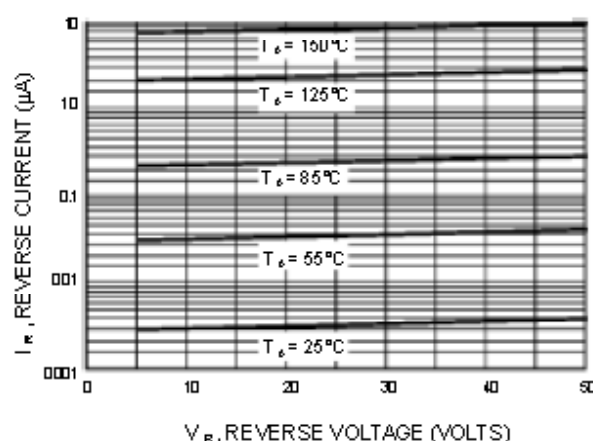
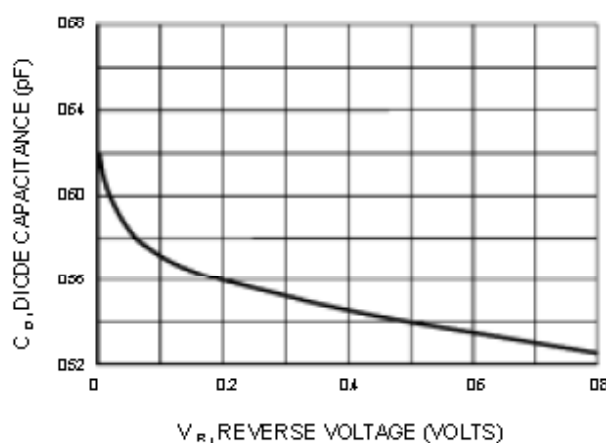
1. FR-4 Minimum Pad

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Characteristic	Symbol	Min.	Max.	Unit
OFF Characteristics				
Reverse Breakdown Voltage ($I_{(BR)} = 100 \mu\text{Adc}$)	$V_{(BR)}$	100	—	Vdc
Reverse Voltage Leakage Current ($V_R = 20 \text{ Vdc}$)	I_R	—	25	nAdc
($V_R = 75 \text{ Vdc}$)		—	5	μAdc
Forward Voltage ($I_F = 10 \text{ mAdc}$)	V_F	—	1	Vdc
Diode Capacitance ($V_R = 0, f = 1.0 \text{ MHz}$)	C_D	—	4	pF
Reverse Recovery Time ($I_F = I_R = 10 \text{ mAdc}, R_L = 50 \Omega$)	t_{rr}	—	4	ns



- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10mA.
 2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10mA.
 3. $t_p \gg t_n$

Figure 1. Recovery Time Equivalent Test Circuit

Figure 2. Forward Voltage

Figure 3. Leakage Current

Figure 4. Capacitance