


General Purpose Rectifiers Glass Passivation Junction

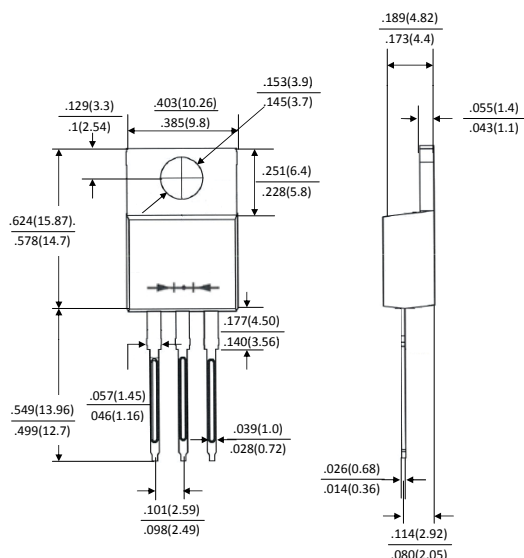

TO-220AB

Dimensions in inches and (millimeters)

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Cases: TO-220AB
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 2.015 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	RL16 01C	RL16 02C	RL16 03C	RL16 04C	RL16 05C	RL16 06C	RL16 07C	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current (Total) (Per Leg)	I_F	16 8							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200.0							A
Maximum Instantaneous Forward Voltage $I_F=8A @ 25^{\circ}C$	V_F	1.15							V
Maximum DC Reverse Current @ $T_c=25^{\circ}C$ at Rated DC Blocking Voltage @ $T_c=100^{\circ}C$	I_R	10 200							μA
Typical Junction Capacitance(NOTE1)	C_j	50							pF
Typical Thermal Resistance	$R_{\theta JC}$	3							$^{\circ}C/W$
Operating Temperature Range	T_J	-55 to +150							$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150							$^{\circ}C$

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

General Purpose Rectifiers Glass Passivation Junction

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

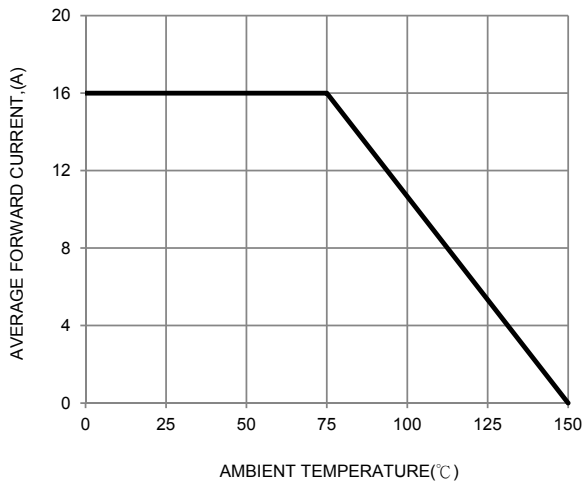


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

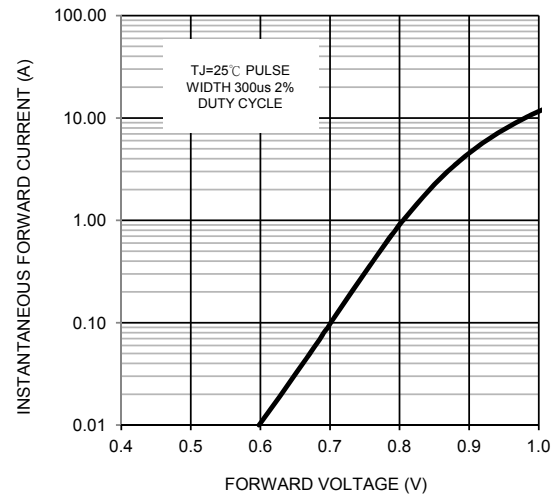


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

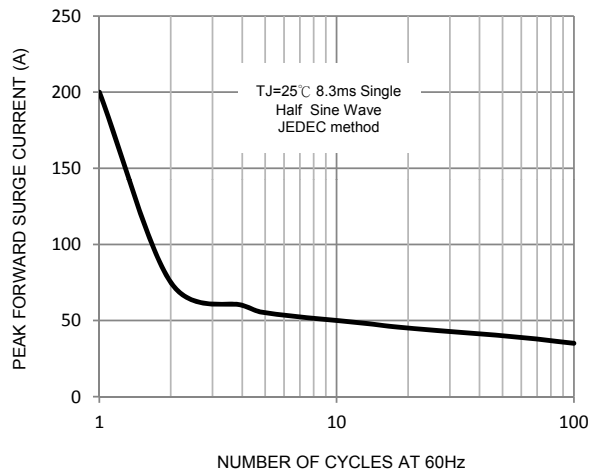


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

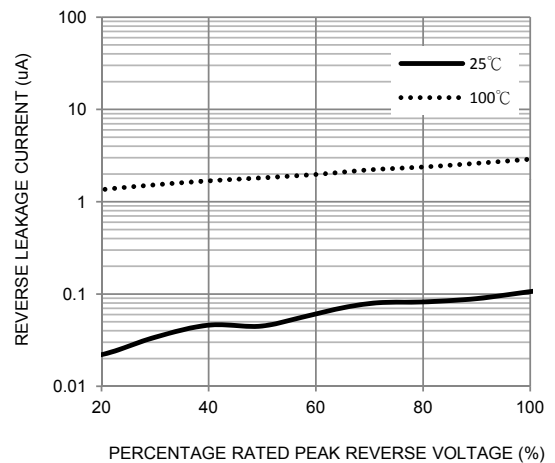


FIG. 5-TYPICAL JUNCTION CAPACITANCE

