


Schottky Barrier Rectifiers

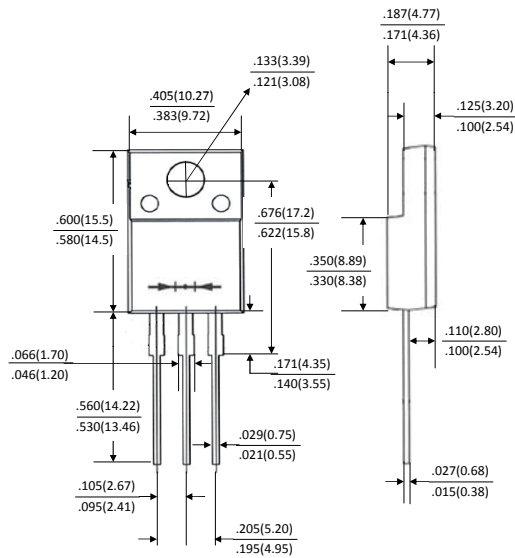

ITO-220AB

Dimensions in inches and (millimeters)

Ordering Information	
Part Number	Remark
SP10xxC	General
SP10xxC-H	Halogen Free
SP10xxC-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	10A
V_{RRM}	20~200V
I_{FSM}	100A
V_F	0.55V, 0.70V, 0.85V, 0.92V
$T_J \text{ max}$	125°C, 150°C

Features

- Guard Ring for over voltage Protection
- High forward surge capability
- High frequency operation
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Case: ITO-220AB
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin Finish annealed over copper Lead frame. Solderable per MIL-STD-202
- Weight: 1.689 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)												
PARAMETER	SYMBOL	SP10 20C	SP10 30C	SP10 40C	SP10 45C	SP10 50C	SP10 60C	SP10 80C	SP10 100C	SP10 150C	SP10 200C	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	45	50	60	80	100	150	200	V
Maximum RMS voltage	V_{RMS}	14	21	28	31.5	35	42	56	70	105	140	V
Maximum DC blocking voltage	V_{DC}	20	30	40	45	50	60	80	100	150	200	V
Maximum average forward rectified current (Total) (Per Leg)	I_F	10 5										A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	100.0										A
Maximum Instantaneous Forward Voltage IF=5A @ 25°C	V_F	0.55			0.70		0.85		0.92			V
Maximum DC Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=125°C	I_R	0.5 20							0.2 5			mA
Typical Junction Capacitance(NOTE1)	C_j	300				210		170				pF
Typical Thermal Resistance	$R_{\theta JC}$	3										°C/W
Operating Temperature Range	T_J	-55 to +125						-55 to +150				°C
Storage Temperature Range	T_{STG}	-55 to +150										°C

NOTES: 1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

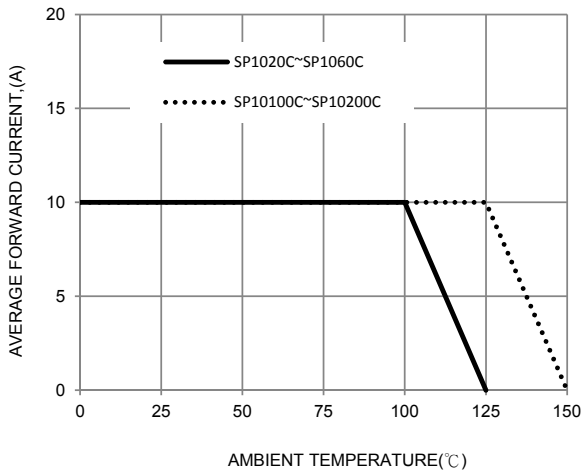


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

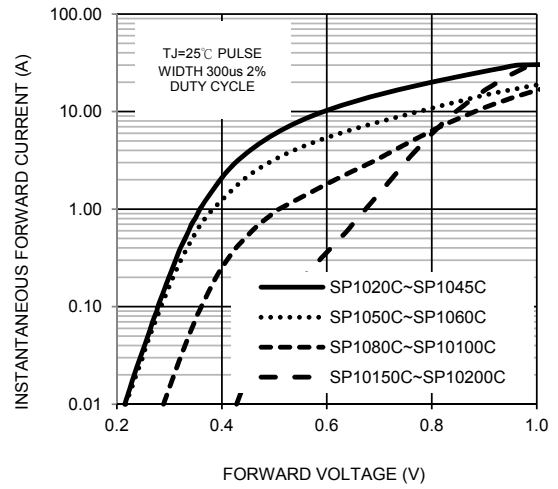


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

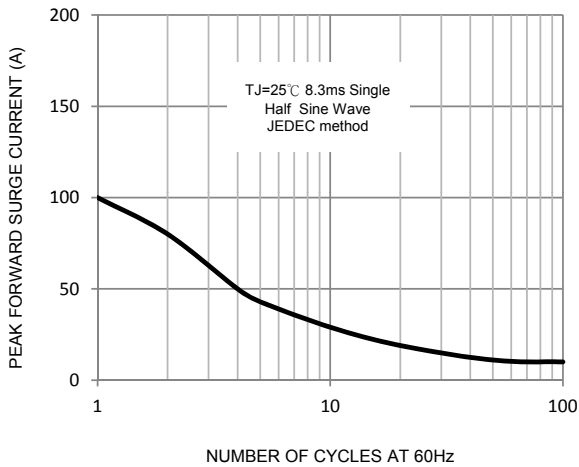


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

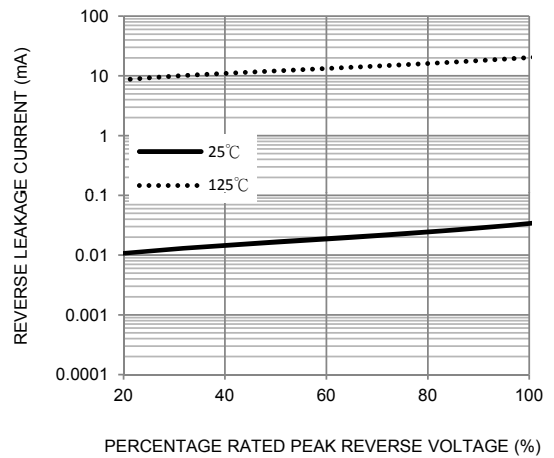


FIG. 5-TYPICAL JUNCTION CAPACITANCE

